


103/2005/050385

REC'D 02 FEB 2005

WFO

PA 1235465

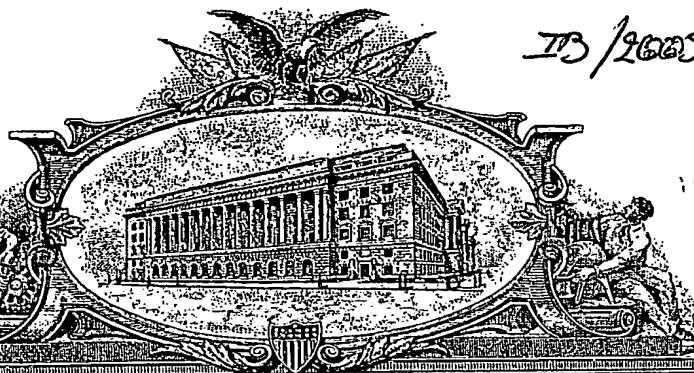

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

October 12, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.


APPLICATION NUMBER: 60/541,207 ✓

FILING DATE: February 02, 2004 ✓

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

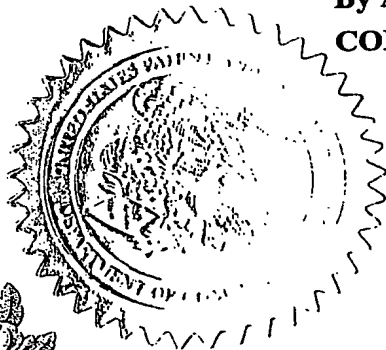

W. Montgomery
W. MONTGOMERY
Certifying Officer

14230 U.S. PTO

Please type a plus sign (+) inside this box → ☐

PTO/SB/18 (02-01)
Approved for use through 10/31/2002. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label N . EV 312 068 343

Date of Deposit: February 2, 2004

322782 U.S. PTO
60/541207

020204

INVENTOR(S)					
Given Name (first and middle (if any))	Family Name or Surname	Residence (City and either State or Foreign Country)			
KIRAN STEFAN	CHALLAPALI MANGOLD	NEW CITY, NEW YORK OSSINING, NEW YORK			
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
USING RANDOMIZED HOUGH TRANSFORM FOR DETECTING RADIO SYSTEMS WITH PERIODIC EMISSION PATTERN					
CORRESPONDENCE ADDRESS					
Direct all correspondence to:					
<input checked="" type="checkbox"/> Customer Number		24737		→ <div style="border: 1px solid black; padding: 5px; display: inline-block;">24737</div>	
OR Type Customer Number here					
<input type="checkbox"/> Firm or Individual Name	PHILIPS INTELLECTUAL PROPERTY & STANDARDS				
Address	P.O. BOX 3001				
Address	345 SCARBOROUGH ROAD				
City	BRIARCLIFF MANOR	State	NEW YORK	ZIP	10510-8001
Country	USA	Telephone	(914) 333-9608	Fax	(914) 332-0615
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages		6	<input type="checkbox"/> CD(s), Number		
<input type="checkbox"/> Drawing(s) Number of Sheets			<input type="checkbox"/> Other (specify)		
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.					
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: 14-1270					
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
FILING FEE AMOUNT (\$) 160.00					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,
SIGNATURE

Date FEBRUARY 2, 2004

TYPED or PRINTED NAME Aaron Waxler

REGISTRATION NO.: 48,027
(if appropriate)

Docket Number: US040108

TELEPHONE (914) 333-9608

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Box 1450, Alexandria, VA 22313-1450

Philips Intellectual Property & Standards

Invention Disclosure Version 1.4.0 14-11-2002

This template is meant for making a detailed description of your invention off-line. The description can then later be attached in electronic form to your ID submission. You must also use this off-line description to obtain export clearance from your local export-control officer.

Inventors name(s) + e-mail address(es):

Kiran Challapali
Kiran.challapali@philips.com
Stefan Mangold
Stefan.mangold@philips.com

Title: Using Randomized Hough Transform for Detecting Radio Systems with Periodic Emission Pattern.

WARNING: Applicable to United States of America, China and United Kingdom. In these countries export control is applicable. Please use this ID template and get clearance from your local export control officer before sending your idea via Inventions On Line to IP&S.

For Export Control Officer (ECO):

Before this ID can be submitted to the automated Invention On Line System of Philips Intellectual Property & Standards it is sent to you in your capacity of Export Control Officer of the entity (Research/Business Unit) the inventor(s) belong(s) to in order to obtain your legally required export clearance. Please fill out the following fields and return the completed form to the inventor/sender.

Name ECO: Betsy McIlvaine

Research/ Business Unit: Philips Research USA

Export clearance yes/no:yes

Export control clearance number:NLR EAR99

Letter of assurance required? (US):no

UWB

Any other comments:

Date of export control:8 Oct 03

In case of any questions ask IP&S Helpdesk ICT

Detailed description of your invention:

Please describe your invention in terms of what is already known, the measures/features of your invention and the resulting advantages. The following scheme may be useful.

- Give some background information in the field of your invention, i.e. state of the art, such as commonly known facts, devices etc. If possible, state references to public documents, such as articles in technical journals, proceedings of conferences, brochures, or patent documents.
- Indicate problems/disadvantages with the state of the art that your invention will overcome. Are the disadvantages/problems new or were they already known?
- The measures/device features that are proposed to solve the problem, and the resulting advantages. If the invention is based on a new understanding (insight), please indicate this.

Confidential. No disclosure of the contents to persons outside Philips is allowed without the written permission of Koninklijke Philips Electronics N.V. who is the owner of this information.



PHILIPS

Philips Intellectual Property & Standards

Invention Disclosure Version 1.4.0 14-11-2002

This template is meant for making a detailed description of your invention off-line. The description can then later be attached in electronic form to your ID submission. You must also use this off-line description to obtain export clearance from your local export-control officer.

- d. Provide at least one embodiment of the invention, where you explain the best way of carrying out the invention. Please add drawings, graphs, test data etc. where appropriate.
- e. Indicate in which fields (technical, commercial) the invention can be applied.



RHT_challapall_mang
old.doc



On using Randomized Hough Transform for Detecting Radio Systems with Periodic Emission Pattern

As indicated in earlier sections, when *radio networks* encounter *other devices* that emit energy (and therefore use shared radio resources) in their vicinity, it is desirable to characterize the radio resource usage patterns of these other devices. Such a characterization of the usage patterns results in the identification of opportunities for the radio networks. Other devices referred to previously includes radars, which are primary emitters, or other radio networks, which are secondary emitters.

In this section we will examine the use of Hough Transform for the detection of radar pulses as an example for any type of radio signals that create periodic patterns. We will use a version of the Hough Transform, known as Randomized Hough Transform (RHT) to detect the parameters of helixes wrapped around cylinders, as explained later in the section. The Hough Transform [] has been studied in image processing literature for detection of patterns such as lines, circles and ellipses in binary images. The effectiveness of Hough Transform in detecting patterns in "imperfect" data with many overlaying patterns and random noise is proven []. In the presence of outliers, the Hough Transform is more robust than least squares estimation [].

In brief, the Hough Transform is used to transform data from image space to an accumulator (or histogram) in parameter space, as shown in the Figure 1 below.

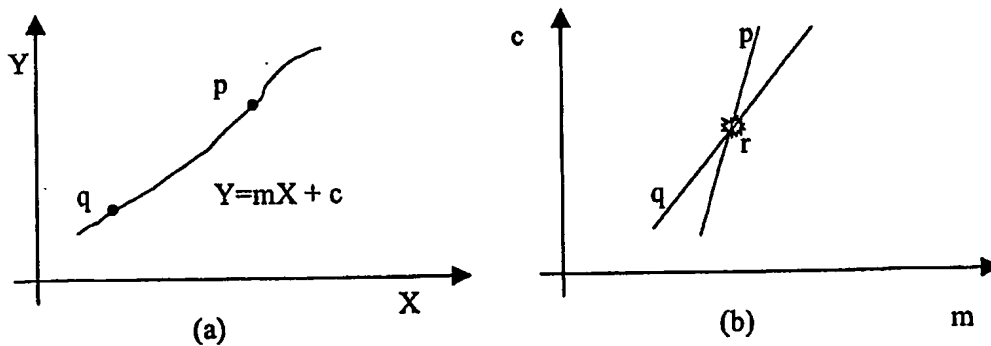


Figure 1: Hough Transform used to detect straight lines (a) image space and (b) parameter space.

The image space is represented by (x, y) , whereas, the parameter space is represented by (slope, intercept), that is (m, c) . For each point in the image space (e.g. p and q), a line is generated in the parameter space as shown. The parameter space can be seen as a two dimensional histogram. A peak (r) in the parameter space corresponds to a line in the image space. The Hough Transform is robust because in the image space, a collection of collinear points is enough to result in a peak in the parameter space. However, it has the drawback that the parameter space could require large amount of memory in the computer. To address this drawback the RHT was developed. The RHT as applied to straight-line detection, results in randomly picking pairs of points and computing and

accumulating a parameter (for instance, slope). When enough confidence in the peak is achieved, the process stops, thus reducing both memory and processing time.

The use of Hough Transform for radar pulse detection was first studied in [1]. The original radar pulse train is a 1-D signal. The authors have used 1-D to 2-D transformation (like a raster scan) and then applied the Hough Transform to detect straight lines, which correspond to pulse trains. Furthermore, they have computed the noise floor. We extend their work by first transforming the 1-D signal to a 3-D helical signal, and apply RHT to it.

A helix may be represented by the following parametric equations:

$$X(t) = \sin(\omega t)$$

$$Y(t) = \cos(\omega t) \dots \dots \dots (1)$$

$$Z(t) = t$$

This helix is cylindrical (as opposed to the more general elliptical) and has unit radius.

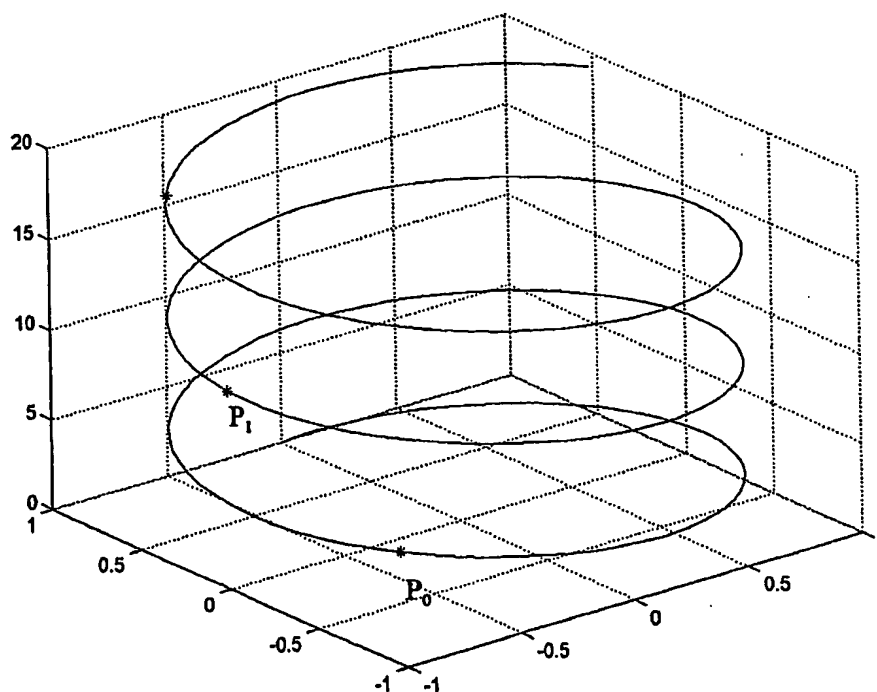


Figure 2: A helix given by the equation 1 above (for $\omega=1$)

Based on the parameter ω a new helix can be generated that wraps around the cylinder more slowly as ω decreases. In Figure 2, the points (red *) on the blue helix themselves form a helix, with an ω value less than one. Given two points on the helix $P_0(x_0, y_0, z_0)$ and $P_1(x_1, y_1, z_1)$, the parameter ω can be given by the following equation:

$$\omega = \left(\frac{a \tan(\frac{y_1}{x_1}) - a \tan(\frac{y_0}{x_0})}{Z_1 - Z_0} \right) \dots \dots \dots (2)$$

If the two points P_0 and P_1 are inside one twirl of the helix, then ω works out to be 1. The length of the line segment given by one twirl of helix is

$$l = 2 * \pi * \sqrt{1 + \left(\frac{1}{\omega} \right)^2} \dots \dots \dots (3)$$

Results

Let us represent the location (time-of-arrival) of the radar pulse train with the vector L_p . For $L_{p1} = [9, 59, 109, 159, 209, 259, 309, 359]$, the following ω histogram is obtained.

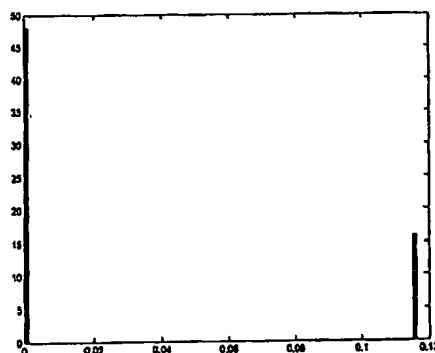


Figure 3: Histogram of ω for L_{p1}

For this case, $\omega = 0.116$. Now let us consider the case where there are two pulse trains that are multiplexed and represented by $L_{p2} = [9, 20, 59, 60, 100, 109, 140, 159, 180, 209, 220, 259, 260, 300, 309, 340, 359]$. The following histogram is obtained. Note that $\omega = 1$ corresponds to points on the helix within one twirl.

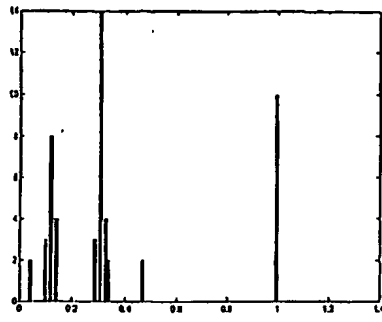


Figure 4: Histogram of ω for L_{p2} .

Potential Extension

The method described in this document may be associated with the alternative way of detection periodic interferences, which is based on the autocorrelation of measurements in time. We expect that both alternatives show advantages and disadvantages in different scenarios, and a combination of both may therefore result in the most precise identification of other radio systems.